

Cleaning Your Shower

- Never use abrasives to clean this product.
- Clean regularly with contamination free warm soapy water or damp soft cloth.

Rail Shower Set with Kiri Rail and Soap Dish (where provided)

Installation Guide

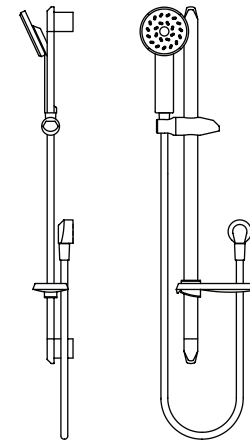


Illustration may not reflect actual product shape.

IMPORTANT

Please read all of the instructions before installation

APR 2012



Methven Australia Pty Ltd

ABN 15 104 813 390

Melbourne, Australia

www.methven.com

www.methven.com

Important Installation Considerations

Please read all of the instructions before installation

1. NOTE: Some showers may not provide an effective shower when used with gravity fed heated water systems or where pressures are less than 150kPa at the outlet. Additionally showers with flow rates of less than 9L p/min may not allow the following to function correctly:
 - some instantaneous water heaters
 - some tempering valves
 - some thermostatic mixing valves
2. Some shower heads only operate correctly when hot and cold water supplies are both mains pressure and may not be suitable for some instantaneous hot water services.
3. When water pressure is in excess of 500kPa a pressure limiting device is required in accordance with AS/NZS 3500 1.12 recommendation; otherwise hose guarantee will be voided
4. Use of this product in non-domestic applications voids warranty
5. Damage caused by hydrostatic testing is not covered by our warranty.
6. Ensure hose is installed correctly (see Fig.1). Outer hose will pinch the inner tube and lead to failure. Such damage is easily recognised and not covered by warranty. Install correctly with a wall elbow (included).



FIG 1.
STOP
DO NOT INSTALL
HOSE THIS WAY

For commercial, industrial or parahealth use; ask your store consultant for correct shower selection.

Shower Installation Instructions

THE TOOLS THAT YOU MAY NEED: SCREWDRIVER, ADJUSTABLE SPANNER AND DRILL.



- 1 Establish the desired rail position and height.
- 2 Carefully remove pillar end caps.
- 3 Locate the bottom pillar in the desired position, drill hole to suit wall plug and attach with screw provided.
- 4 Attach the slider and soap dish to the rail in the desired orientation.
- 5 Fit the rail to the bottom pillar.
- 6 Fit the top pillar to the rail, drill hole to suit wall plug and attach with screw provided.
- 7 Drill additional holes to suit wall plugs through top and bottom pillars and attach with screws provided.
- 8 Replace pillar end caps.
- 9 Adjust the slider and soap dish on the rail to the desired position.
- 10 Clean the exposed thread and bind clockwise with thread sealing tape.
- 11 Fit the elbow to the thread. Tighten only by hand.
(Ensure that the elbow is vertical so that the hose hangs straight down).
- 12 Connect the hose and handset using the washers supplied. Hand-tighten only.

THE METHVEN GUARANTEE

The warranty statement shall apply to all tapware & showers supplied by Methven

For more information visit www.methven.com

THIS WARRANTY ISSUED BY: Methven Australia Pty Ltd, Melbourne Australia