


01-5801
KIRI WALL TOP
ASSEMBLY PAIR

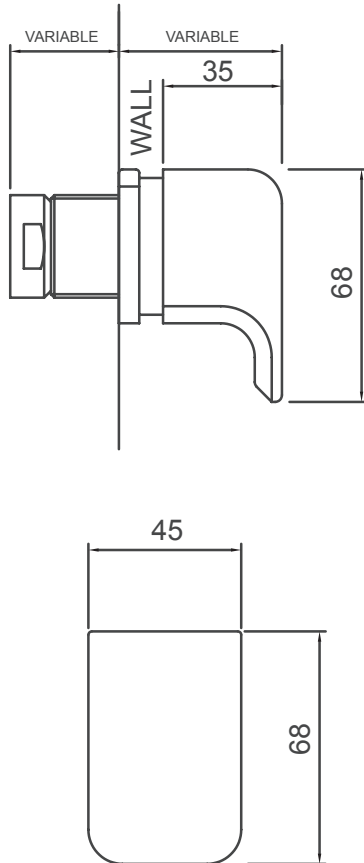

FINISH: Chrome

CONSTRUCTION: Brass
CARTRIDGE TYPE: 1/4 turn ceramic
SUPPLY: Mains Pressure
CONNECTIONS: Suitable for standard breach
WORKING PRESSURES: 150 - 500 kpa
OPERATING TEMPERATURE: 5°C to 70°C*

*Refer AS/NZS 3500

Standard Pair

- 1/4 turn ceramic disc technology
- Contra-rotating handles
- Solid easy-to-grip modular handles
- Suitable for retro-fit to existing wall breach
- Suitable for use in conjunction with Kiri wall mounted bath and basin spouts
- Suitable for mains pressure installation
- WELS rating not required