

Warranty Information

Proof of purchase will be required.

The guarantee does not cover faults or damage caused by incorrect installation and/or maintenance, ordinary wear and tear, water composition, etc.

*Please see www.methven.com for full terms and conditions of warranty

Cleaning

Your product has a high-quality finish and should be treated with care to preserve the visible surfaces. Never use abrasives or abrasive cleaning agents to clean this product clean regularly with contamination free warm water and a damp soft cloth. Do not use products containing chlorine bleach or hydrochloric acid as these can damage the product.

We have a policy of continuous improvement and reserve the right to change specifications without notice.

METHVEN UK LIMITED
METHVEN EXPERIENCE CENTRE
3/3A STONE CROSS COURT
YEW TREE WAY
GOLBORNE

WARRINGTON
WA3 3JD
UNITED KINGDOM

INST-AVBFCP
V1 23.04.2024

TEL: 0800 195 1602
FAX: 0844 406 8690
EMAIL: sales@uk.methven.com
www.deva-uk.com
www.methven.com

Avoca Bath Filler

Chrome

AVBFCP

Installation Guide

Technical Specification

Working Pressure:

Min: 0.1 Bar

Max: 5.0 Bar

Operating Temperature:

Hot: 65°C

Cold: 5°C

Inlet Connections:

3/4" BSP

Features:

- Suitable For High & Low Pressure Systems
- 1/4 Turn Ceramic Disc
- H & C Temperature Indicator
- Single Flow Bath Filler With Pre-Fitted Flow Straightener
- Tap Height 143mm,
- Spout Height 69mm
- Spout Reach 106.5mm
- Brass Backnuts
- Waste Not Included



METHVEN
www.methven.com EST 1886

Please keep these instructions for future reference and request of replacement parts

General Safety Information

Please read all of the instructions before installation.

Methven recommends this product is installed by a competent person in compliance with all relevant regional regulations.


Remove all packaging and check the components for damage before starting installation.

This product **must** not be modified in any way as this will invalidate the guarantee.

It is the responsibility of the installer to ensure a waterproof seal is achieved, after installation all connections must be checked for leaks.

All outlets used primarily for personal hygiene shall deliver water at a safe temperature as per regional regulations.

Line Drawing (mm)

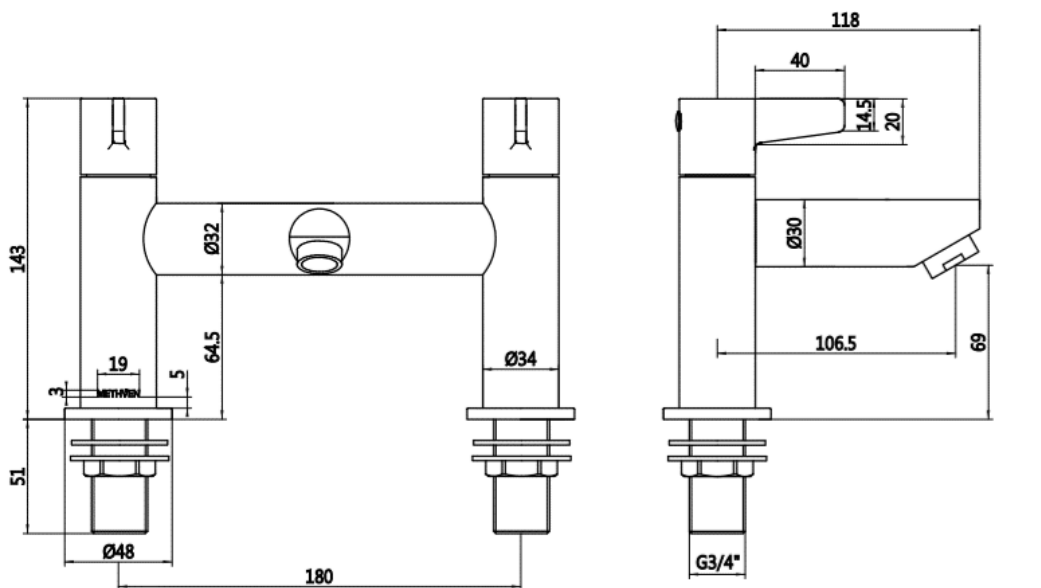

Before commencing installation of the new product, ensure that the system has been flushed to remove any debris, which could cause damage to the valves and invalidate the warranty.

Installation

- 1, Remove the back nuts (13) and back nut washer (12) from the threaded connection (11).
- 2, Push the mixer threaded connections through the holes in the bath, ensuring that the base plates (8) are correctly positioned, fully covering the mounting holes.
- 3, Place the back nut washer (12) and back nuts (13) back onto the threaded connections (11), under the bath, and screw up until the tap is secured in position (do not overtighten). Please note additional sealant can be used if required.
- 4, Connect the water supply pipes to the threaded connections and tighten, an adequate sealing method should be used to create a water tight seal.
- 5, Reinststate the water supply and test for leaks.

Product Breakdown

Check all components are present prior to starting installation.

