


AIO OVERHEAD SHOWER CP

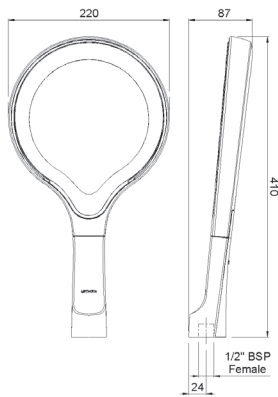

CONSTRUCTION: ABS

SUPPLY: Suitable For High Pressure Systems

INLET CONNECTIONS: 1/2" BSP

WORKING PRESSURES: 1.0 - 5.0 bar

- Limescale Resistant - Hydrophobic Properties Resists The Build Up Of Limescale
- Water Efficient Without Compromising Performance
- Rotary Ceramic Diverter Cartridge For Smooth Operation
- Quick Fit Connector For Easy Installation
- Comes Complete With 15Mm (1/2" Bsp) Threaded Connection
- Fitted With 12 L/Min Flow Regulator
- Twin With A Kaha Or Kiri Single Outlet Shower Valve

AOOSCPUK

Open Outlet Flow (Bar - l/min)

BAR	0.3	0.5	1.0	2.0	3.0	4.0	5.0
HANDSET FLOW	5.5	7.2	9.9	11.4	11.6	11.6	11.1

Chrome



2009723



2105800



Please Note: Flow rate will be dictated by installation configurations.
Please ensure to check the appropriate flow restrictor information if applicable.
*Please refer to website for full warranty details.

FREEPHONE: 0800 195 1602 | FAX ORDERS: 08444 068 690 | EMAIL: SALES@UK.METHVEN.COM

methven.com

THE INFORMATION ON THIS SPECIFICATION DOCUMENT WAS CORRECT AT THE DATE OF ISSUE. SOME VARIATION MAY OCCUR DUE TO THE MANUFACTURING TOLERANCES AND SITE SPECIFIC CONDITIONS.