


AIO SHOWER SYSTEM CP

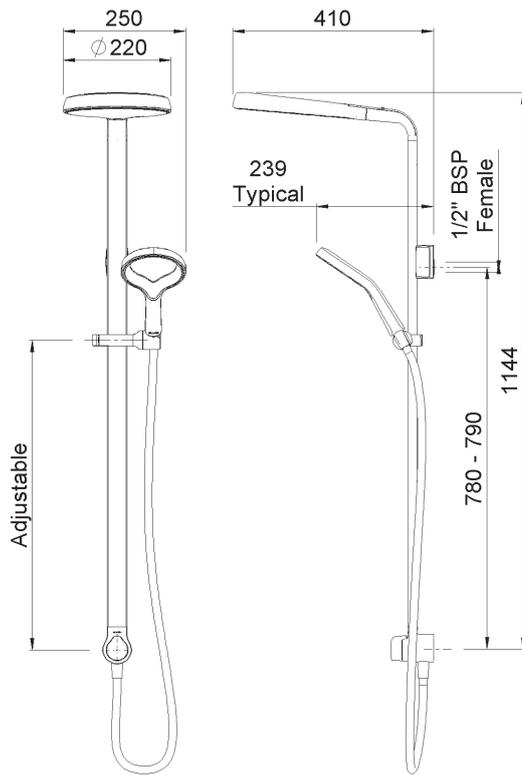

CONSTRUCTION: Brass & ABS
CARTRIDGE/VALVE TYPE: N/A
SUPPLY: Suitable For High Pressure Systems
INLET CONNECTIONS: 1/2" BSP
WORKING PRESSURES: 1.0 - 5.0 bar
OPERATION:

- Limescale Resistant - Hydrophobic Properties Resists The Build Up Of Limescale
- Water Efficient Without Compromising Performance
- Integrated Diverter
- Rotary Ceramic Diverter Cartridge For Smooth Operation
- Quick Fit Connector Between Head & Rail For Easy Installation
- Comes Complete With 15Mm (1/2" Bsp) Threaded Connection
- Fitted With 12 L/Min Flow Regulator In Overhead And 8 L/Min In Handset
- Twin With A Kaha Or Kiri Single Outlet Shower Valve

AOSSCPUK

Open Outlet Flow (Bar - l/min)

BAR	0.3	0.5	1.0	2.0	3.0	4.0	5.0
HANDSET FLOW	4.8	6.3	8	7.7	8.2	0	0
OVERHEAD FLOW	0	0	9.1	10.1	10.2	11	11.3

Chrome



2009723



2105800



Please Note: Flow rate will be dictated by installation configurations.
 Please ensure to check the appropriate flow restrictor information if applicable.
 *Please refer to website for full warranty details.

FREEPHONE: 0800 195 1602 | FAX ORDERS: 08444 068 690 | EMAIL: SALES@UK.METHVEN.COM

methven.com

THE INFORMATION ON THIS SPECIFICATION DOCUMENT WAS CORRECT AT THE DATE OF ISSUE. SOME VARIATION MAY OCCUR DUE TO THE MANUFACTURING TOLERANCES AND SITE SPECIFIC CONDITIONS.