


## COMO CONCEALED SHOWER PACK (FLEXI)

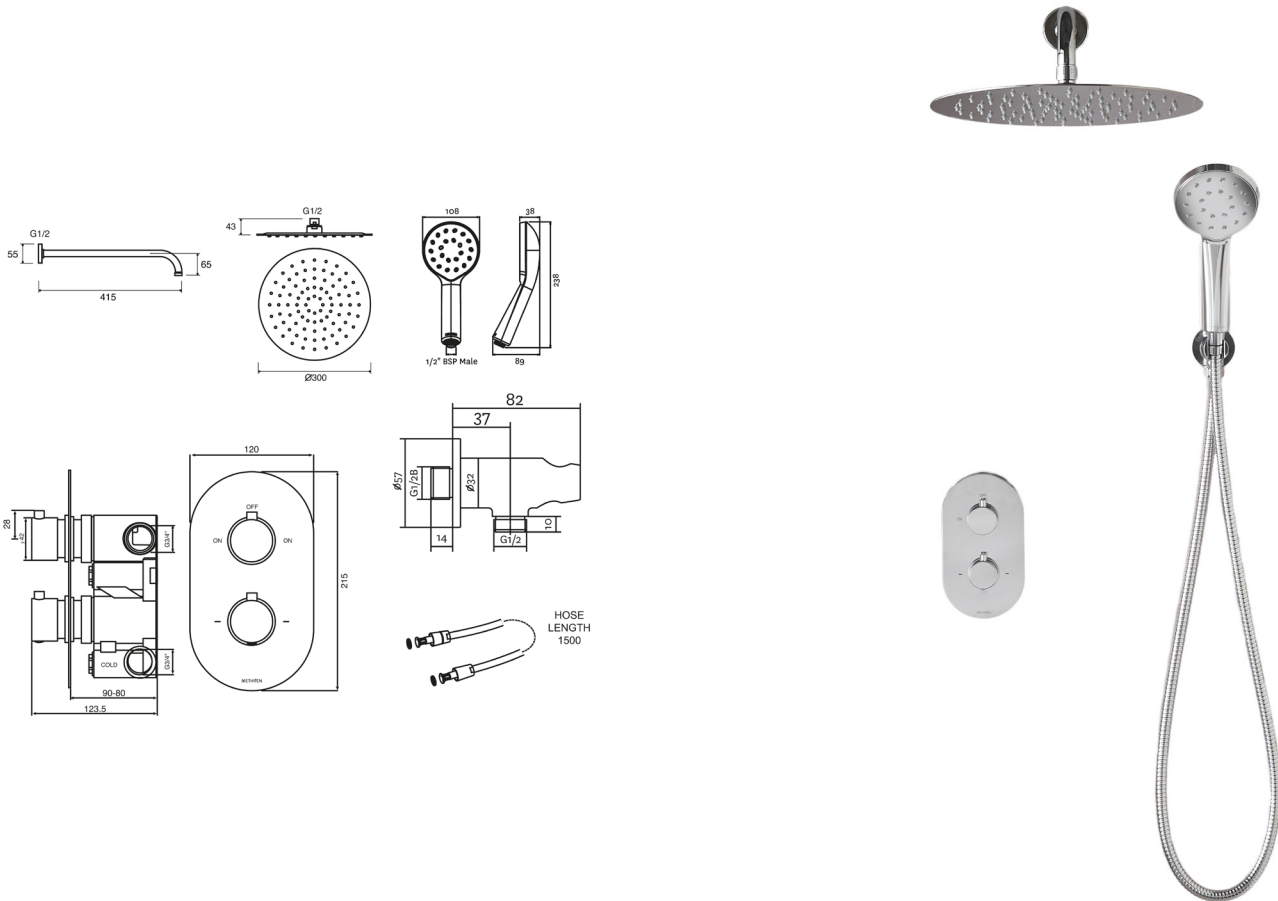

**CONSTRUCTION:** Brass & ABS Handset  
**CARTRIDGE/VALVE TYPE:** Thermostatic  
**SUPPLY:** Suitable For Low Pressure Systems  
**INLET CONNECTIONS:** 1/2" BSP  
**WORKING PRESSURES:** 0.3 - 5.0 bar  
**OPERATION:** Separate Flow And Temperature Controls

- Diverter Cartridge To Two Outlets
- 38°C Temperature Hot Stop With Override Facility
- Patented Satinjet showering technology in the handset is optimised at 8 litres per minute
- Front Access Filters - No Need To Disconnect Shower From Water Supply During Maintenance
- Easy To Fit Shower Rail - Simply Twist And Lock Brackets Into Place
- Smooth Easy Clean 1.5M Shower Hose
- Includes 300mm overhead at 8l/min
- TMV2 approved valve

CSPR09	Chrome							
--------	--------	--	--	--	--	--	--	--

**Open Outlet Flow (Bar - l/min)**

BAR	0.1	0.3	0.5	1.0	2.0	3.0	4.0	5.0
<b>HANDSET FLOW</b>	3.5	5.3	7	9	8	8.4	8.4	8.2
<b>OVERHEAD FLOW</b>	4.5	6.3	7.6	8.7	8	8.5	8.5	8.2



Please Note: Flow rate will be dictated by installation configurations.  
 Please ensure to check the appropriate flow restrictor information if applicable.  
 \*Please refer to website for full warranty details.



2402168