
METHVEN



KAHA 3 DIRECTION CONCEALED SHOWER CHROME



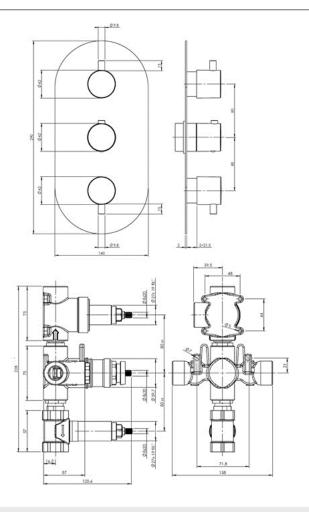

CONSTRUCTION: Brass

CARTRIDGE/VALVE TYPE: Thermostatic **SUPPLY:** Suitable For All Plumbing Systems

INLET CONNECTIONS: 1/2" BSP
WORKING PRESSURES: 0.1 - 5.0 bar

OPERATION: Separate Flow And Temperature Controls

- \cdot Diverter Cartridge To Two Outlets And Separate Stopcock For Bathfill
- · 38°C Temperature Hot Stop With Override Facility
- $\cdot \ {\rm Brass} \ {\rm Concealing} \ {\rm Plate}$
- · Front Access Filters No Need To Disconnect Shower From Water Supply During Maintenance
- $\cdot \ \mathsf{Concealed} \ \mathsf{Shower} \ \mathsf{Spindle} \ \mathsf{Extension} \ \mathsf{Available}$
- \cdot Can Be Purchased As Seperate Valve And Trims Valve 3D & Tr Kaha 3D

KAHA-3D

Chrome

Open Outlet Flow (Bar - I/min)

BAR 0.1 0.3 0.5 1.0 2.0 3.0 4.0 5.0 FLOW 6.1 11.8 15.7 22.6 32.5 40 46.2 51.4









Please Note: Flow rate will be dictated by installation configurations. Please ensure to check the appropriate flow restrictor information if applicable.

*Please refer to website for full warranty details.