


## PAXTON BATH FILLER

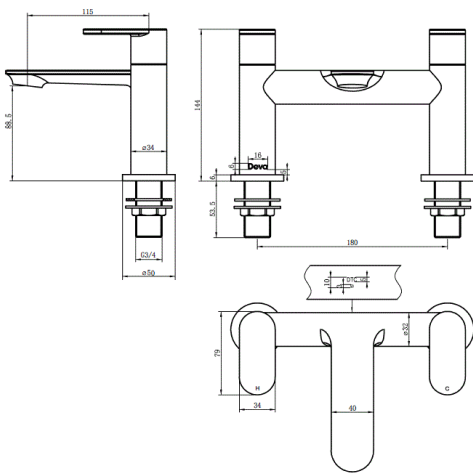

**CONSTRUCTION:** Brass

**CARTRIDGE/VALVE TYPE:** ¼ Turn Ceramic Disc

**SUPPLY:** Suitable For Low Pressure Systems

**INLET CONNECTIONS:** ¾" BSP

**WORKING PRESSURES:** 0.1 - 5.0 bar

**OPERATION:** Separate Flow And Temperature Controls

- Suitable For A Two Tap Hole Bath
- Deck Mounted
- ¼ Turn ¾" Male Quarter Turn Ceramic Disc Valves
- Metal Back Nuts
- Suitable For All Water Pressures

PABFCP

Chrome

### Open Outlet Flow (Bar - l/min)

| BAR               | 0.1 | 0.3 | 0.5  | 1.0  | 2.0  | 3.0  | 4.0  | 5.0  |
|-------------------|-----|-----|------|------|------|------|------|------|
| <b>SPOUT FLOW</b> | 6   | 9.3 | 12.5 | 18.3 | 26.2 | 32.2 | 37.1 | 41.5 |



2206328



Please Note: Flow rate will be dictated by installation configurations.  
Please ensure to check the appropriate flow restrictor information if applicable.  
\*Please refer to website for full warranty details.

**FREEPHONE: 0800 195 1602 | FAX ORDERS: 08444 068 690 | EMAIL: SALES@UK.METHVEN.COM**

methven.com

THE INFORMATION ON THIS SPECIFICATION DOCUMENT WAS CORRECT AT THE DATE OF ISSUE. SOME VARIATION MAY OCCUR DUE TO THE MANUFACTURING TOLERANCES AND SITE SPECIFIC CONDITIONS.