


WAIPORI COOL TO TOUCH BAR SHOWER

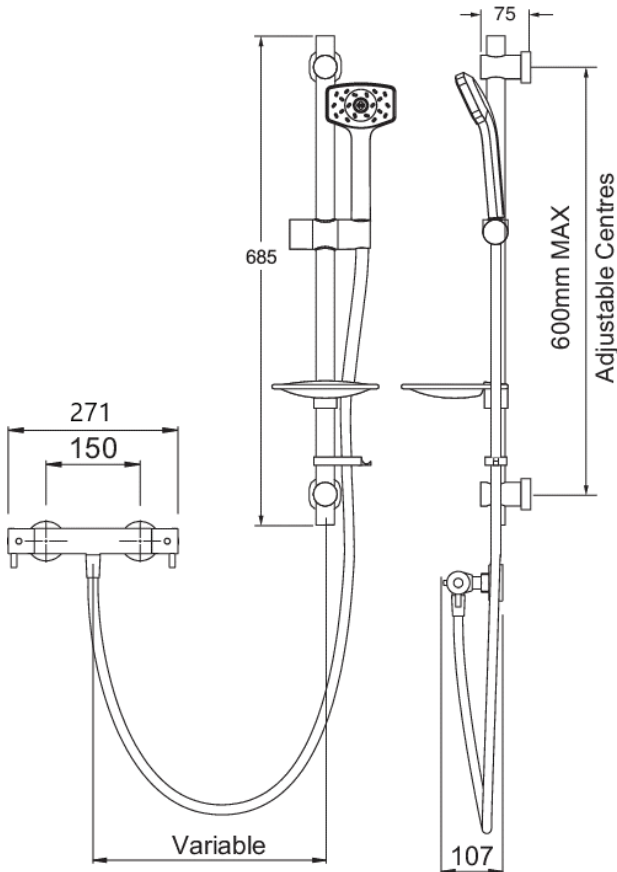

CONSTRUCTION: Brass

SUPPLY: Suitable For High Pressure Systems

INLET CONNECTIONS: 15mm compression

WORKING PRESSURES: 1.0 - 5.0 bar

CARTRIDGE/VALVE TYPE:Thermostatic

- Safe Cool To Touch Body
- 38°C Temperature Hot Stop With Override Facility
- Easy To Fit Shower Rail - Simply Twist And Lock Brackets Into Place
- Includes Waipori Satinjet Handset
- Smooth Easy Clean 1.5M Hose
- Includes Easy Fit Connections
- Fitted With 8L/Min Flow Regulator
- TMV2 Approved Valve

WKCTS

Open Outlet Flow (Bar - l/min)

| BAR | 0.1 | 0.3 | 0.5 | 1.0 | 2.0 | 3.0 | 4.0 | 5.0 |
|--------------|-----|-----|-----|-----|-----|-----|-----|-----|
| HANDSET FLOW | 2.5 | 5 | 6.4 | 7.8 | 7.7 | 8.3 | 0 | 0 |

Chrome & Graphite



2306913



2310587

Please Note: Flow rate will be dictated by installation configurations.
Please ensure to check the appropriate flow restrictor information if applicable.
*Please refer to website for full warranty details.

FREEPHONE: 0800 195 1602 | FAX ORDERS: 08444 068 690 | EMAIL: SALES@UK.METHVEN.COM

methven.com

THE INFORMATION ON THIS SPECIFICATION DOCUMENT WAS CORRECT AT THE DATE OF ISSUE. SOME VARIATION MAY OCCUR DUE TO THE MANUFACTURING TOLERANCES AND SITE SPECIFIC CONDITIONS.